
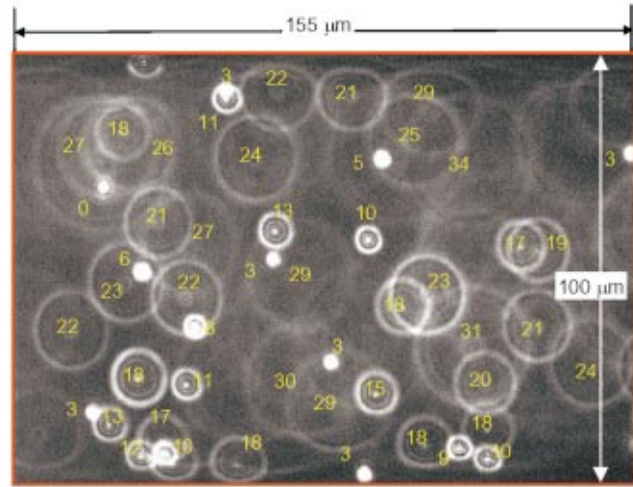


Tracking of Line-of-Sight Locations (CLSM)

Tracking of Line-of-Sight Locations (OSSM)

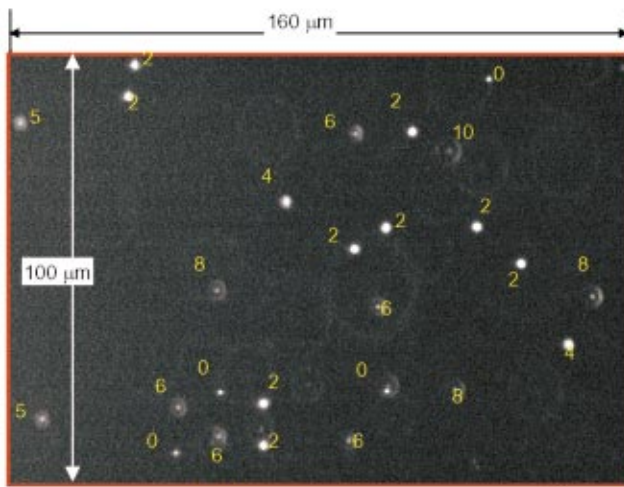

Nanoparticle Tracking Using CLSM* & OSSM** Imaging

J.S. Park, C.K. Choi and K.D. Kihm

Micro/Nano-Scale Fluidics and Heat Transport Laboratory [<http://go.to/microlab>]
Texas A&M University, College station, Texas

The **Confocal Laser Scanning Microscopy*** (CLSM) and **Optical Serial Sectioning Microscopy**** (OSSM) enable nano-particle tracking to locate their axial locations with a micrometer resolution. The three-dimensional diffraction patterns, so-called Point Spread Function (PSF), are theoretically predicted and experimentally validated so that the defocus distance (Δz) can be determined from the comparison of the two. A plan-fluorite objective (40X, NA 0.75) are used to detect the diffraction patterns of 500-nm fluorescence-coated polystyrene spheres suspended in the 170- μm deep micro-layer of water.